


Industrial Cable Gland

A2 Cable Gland

Size	: 16mm to 115mm & ½" to 4"	Thread	: Metric, NPT
Standard	: BS 6121: Part-1:2005, EN 50262:1999, IEC62444:2010	Operating Temp.	: -60°C to +125°C
Function	: Providing seal on outer sheaths of all types of unarmoured cable in indoor and outdoor area.	Cable Type	: Unarmoured Cable
Ingress Protection	: IP66	Features	: Outer Displacement Seal
Material	: Brass CW614N, Stainless Steel 316L	Seal Material	: LSOH Silicone Seal & LSOH Nylon Washer
		Accessories	: PVC Shroud, Earth Tag, Thread Seal, Serrated Washer

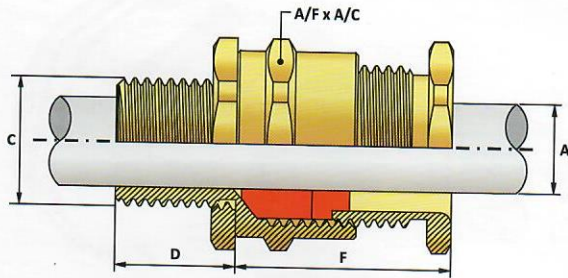

Gland Selection Chart

Size	Standard Thread Size "C"		Optional Thread		Thread Length "D"	Cable Dia. A		Protrusion Length "F"	A/F	A ₂ C
	Metric	NPT	Metric	NPT		Min.	Max.			
20s16	20	½"	25	¾"	10.00	3.10	8.60	25.75	24.00	26.20
20S	20	½"	25	¾"	10.00	6.10	11.70	25.75	24.00	26.20
20	20	½"	25	¾"	10.00	6.50	13.90	26.25	27.00	29.50
25	25	¾"	32	1"	10.00	11.30	19.90	34.00	36.00	39.20
32	32	1"	40	1½"	10.00	17.00	26.20	35.00	41.00	45.00
40	40	1¼"	50	1½"	15.00	23.60	32.10	35.00	49.00	53.00
50S	50	1½"	63	2"	15.00	31.50	38.20	33.00	54.50	60.00
50	50	2"	63	2½"	15.00	35.80	44.00	37.00	60.00	65.00
63S	63	2"	75	2½"	15.00	41.70	50.00	34.25	67.50	72.00
63	63	2½"	75	3"	15.00	47.50	56.00	37.25	75.00	80.00
75S	75	2½"	90	3"	15.00	55.00	62.00	40.75	80.00	85.00
75	75	3"	90	3½"	15.00	62.00	68.00	44.00	84.00	90.00
90	90	3½"	100	4"	18.00	67.00	79.00	51.50	106.00	114.00
100	100	4"	-	-	20.00	77.00	91.00	56.00	122.00	130.00
110	110	-	-	-	20.00	86.00	100.00	54.50	138.00	146.00
115	115	-	-	-	20.00	86.00	102.00	54.50	138.00	146.00

Product Code for Ordering Purpose

Size	Type	Material	Thread Type	Shroud Type	Accessories
20s16	A2	Brass-1	Standard Metric-11	PVC Shroud-PS	Steel Lock Nut-5
		Stainless Steel-2	Standard NPT-12	Dip Moulding Shroud-DS	IP Washer-6
		Nickel Plated-3	Optional Metric-16	LSF Shroud-LS	
			Optional NPT-17		

How to Order ?

Item Code: 20s16A2 1 11 PS 5
Code Meaning: Brass A2 20s16 Cable Gland.

20s16=Gland Size, A2=Gland Code,
 1= With Brass Material, 11=With Standard Metric Thread,
 PS= With PVC Shroud, 5=With Steel Lock Nut.